


## SL Series

SLURRY FLOOR COATING SYSTEMS



# Brilliant SL-4UcVeVeVef

- ① Prepared Concrete
- ② Urethane Cement
- ③ Vinyl Ester Primer
- ④ Vinyl Ester
- ⑤ Vinyl Ester Flake

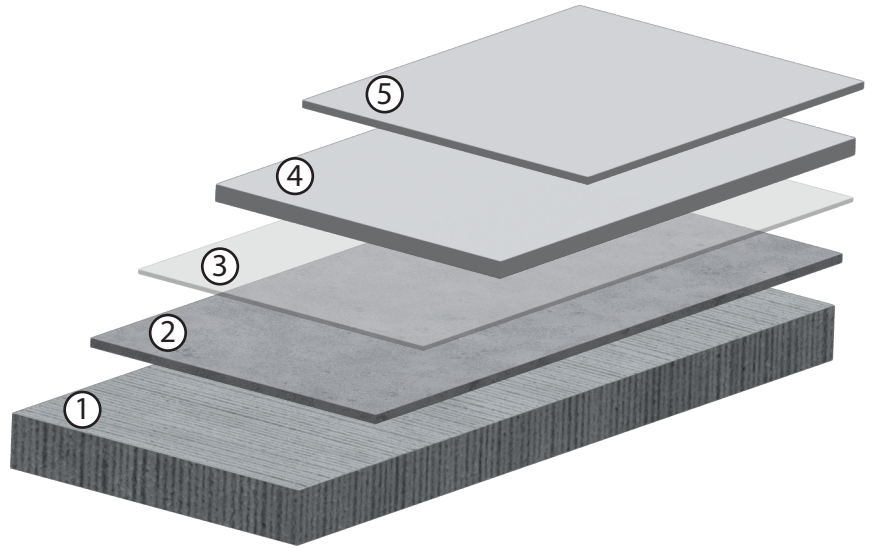

### System Description:

The Brilliant BC-4UcVeVeVef system consists of a base coat of urethane cement. The urethane cement is then coated with vinyl ester primer, followed by vinyl ester trowel-applied coat. The system is then top coated with a flake-filled vinyl ester coating. This system exhibits excellent chemical, wear, impact, and abrasion resistance.

### System Advantages:

- Cap restoration
- Self leveling
- High impact resistance
- Withstands high temperatures
- Handles intermittent spills up to 140 degrees Fahrenheit
- Reinforced flake top coat
- Excellent permeation resistance
- Excellent chemical resistance
- Excellent wear characteristics
- Available in variety of colors for finish coats

### System Installation Overview:

1. Saw cuts, divots, pits, and small defects to be patched and filled with cement patch.
2. Apply a layer Urethane Cement slurry.
3. Apply a layer of VE-PR Flex primer at 6-8 mils.
4. Apply a build coat of VE-CR with VE-Powder at 40-60 mils.
5. Broadcast Aggregate Sand to full refusal into the vinyl ester.
6. Apply a top coat of VE-CR Flake with VE-Curing Aid at 15-20 mils.

Concrete  
Protection

Industrial  
Toughness

Customer  
Committed

480-203-2444  
info@brilliantaz.com  
www.brilliantaz.com  
ROC#323537