


CT Series

FLOOR COATING SYSTEMS



Brilliant CT-3VeVeVef

- ① Prepared Concrete
- ② Vinyl Ester Primer
- ③ Vinyl Ester
- ④ Vinyl Ester Flake

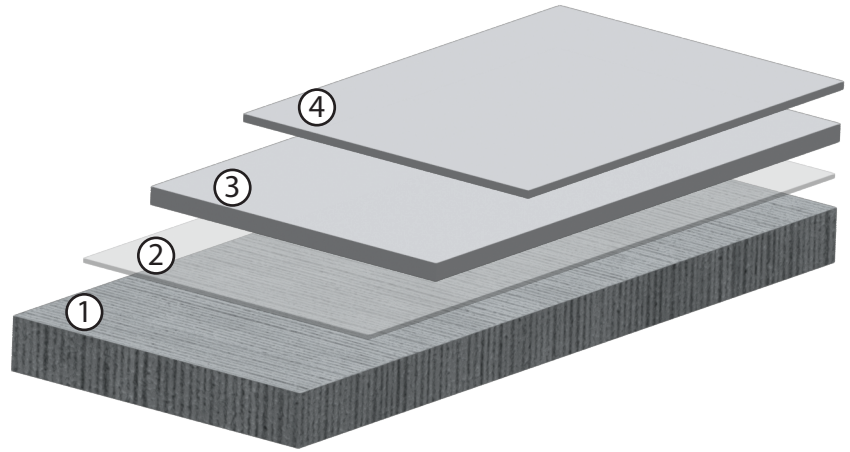

System Description:

The Brilliant CT-3VeVeVef system consists of vinyl ester primer, followed by vinyl ester trowel-applied base coat. The system is then top coated with a flake-filled vinyl ester coating. This system exhibits excellent chemical, wear, impact, and abrasion resistance.

System Advantages:

- Withstands high temperatures
- Handles intermittent spills up to 140 degrees Fahrenheit
- Reinforced flake top coat
- Excellent permeation resistance
- Excellent chemical resistance
- Excellent wear characteristics
- Available in variety of colors for finish coats

System Installation Overview:

1. Saw cuts, divots, pits, and small defects to be patched and filled with cement patch.
2. Apply a layer of VE-PR Flex primer at 6-8 mils.
3. Apply a build coat of VE-CR with VE-Powder at 40-60 mils.
4. Apply a top coat of VE-CR Flake with VE-Curing Aid at 15-20 mils.



480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537