


BC Series

BROADCAST FLOORING SYSTEMS



Polyaspartic Supreme Full Chip System

- ① Prepared Concrete
- ② 100% Solids Epoxy
- ③ Acrylic Flake Broadcast
- ④ Polyaspartic
- ⑤ Polyaspartic

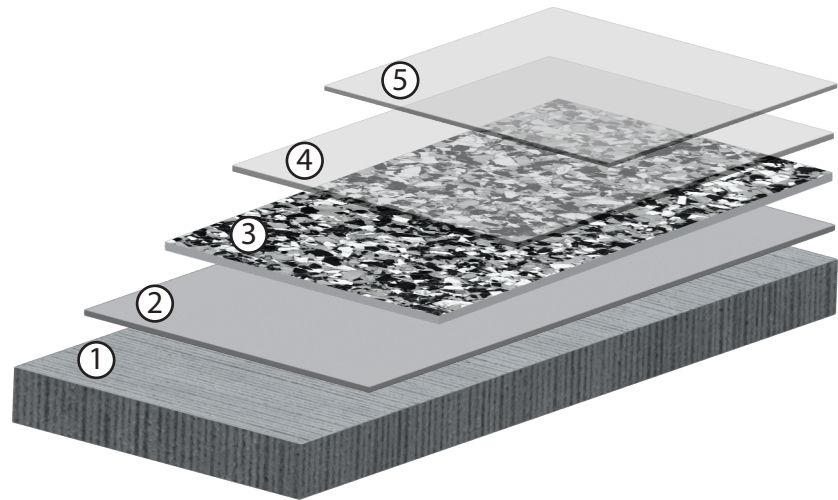

System Description:

The Polyaspartic Supreme Full Chip System is a high-performance flake system consisting of an epoxy base layer which acrylic flakes are fully broadcasted into. The flakes are then sealed with two layers of polyaspartic. This system is formulated for use in garages, automobile showrooms, storage sheds, craft rooms, and more!

System Advantages:

- Quick turnaround/return to service
- Additional layer of high performance polyaspartic
- Slip resistant
- High impact and abrasion resistance
- Easily repaired
- Hides dirt and debris
- Low odor
- Color and UV stable
- Utilizes Sherwin Williams industrial products
- Lifetime warranty



System Installation Overview:

1. Saw cuts, divots, pits, and small defects in concrete to be patched and filled with flex paste.
2. Apply a layer of pigmented Sherwin Williams 100% Solids Epoxy at 10 mils.
3. Broadcast acrylic flakes to full refusal into epoxy.
4. Apply a grout coat of Sherwin Williams Polyaspartic at 12 mils.
5. Apply a top coat of Sherwin Williams Polyaspartic at 6 mils.

Concrete
Protection

Industrial
Toughness

Customer
Committed

480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537