


SL Series

SLURRY FLOORING SYSTEMS



SL-4UcAPP

- ① Prepared Concrete
- ② Urethane Cement Slurry
- ③ Aggregate Sand Broadcast
- ④ 100% Solids Polyaspartic
- ⑤ 100% Solids Polyaspartic

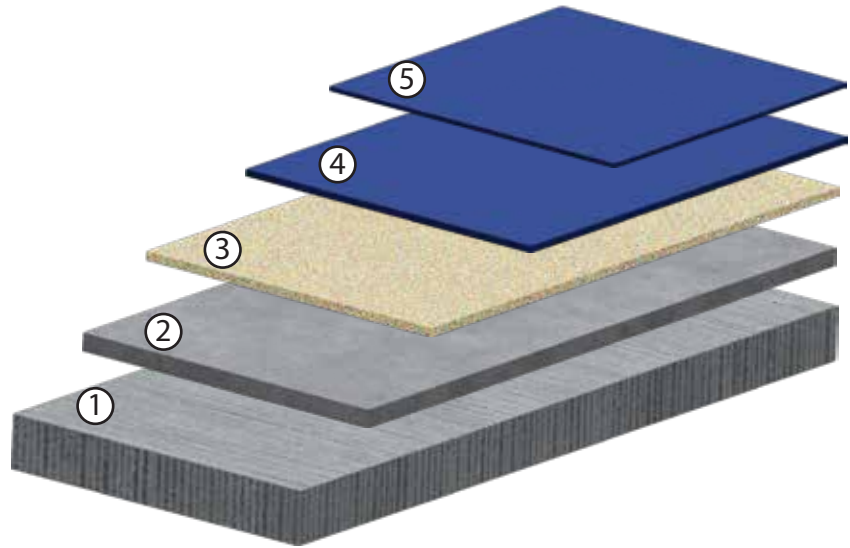

System Description:

The SL-4UcAPP system consists of a urethane cement slurry followed by a aggregate sand broadcast. The aggregate is then grout coated and top coated with high-performance 100% solids polyaspartic.

System Advantages:

- Quick turnaround/return to service
- Resistant to hot grease (will not soften due to boiling water)
- Seamless
- High compressive strengths
- Easily repaired
- Stands up to solvent-based cleaners
- Very good adhesion to damp concrete
- Does not "white out" with traffic
- Chip-resistant
- Color and UV stable

System Installation Overview:

1. Saw cuts, divots, pits, and small defects in concrete to be patched and filled with flex paste.
2. Apply a Urethane Cement self-leveling grade, light duty Urethane Concrete Slurry.
3. Broadcast aggregate sand to full refusal into the urethane.
4. Apply a grout coat of 100% Polyaspartic at 16 mils.
5. Apply a top coat of 100% Polyaspartic at 6 mils.



480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC #323537