




Brilliant BC-5MvbEFPP

- (1) Prepared Concrete
- (2) Moisture Vapor Barrier (MVB)
- (3) 100% Solids Epoxy
- 4 Acrylic Flake Broadcast (Aggregate and Rubber Options)
- (5) Polyaspartic
- 6 Polyaspartic

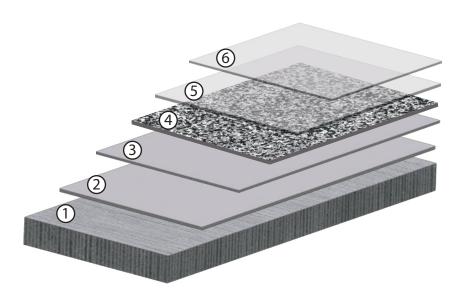

System Description:

The Brilliant BC-5MvbEFPP is a high-performance outdoor broadcast system which consists of a moisture vapor barrier followed by a layer of 100% solids epoxy. Acrylic flakes are then fully broadcasted into the epoxy. The flakes are then sealed with two layers of polyaspartic. This system is formulated for use on patios, walkways and more.

System Advantages:

- Quick turnaround/return to service
- Moisture vapor barrier installed as first layer
- Slip resistant
- · High impact and abrasion resistance
- Easily repaired
- Hides dirt and debris
- · Color and UV stable

System Installation Overview:

- 1. Apply a layer of pigmented Moisture Vapor Barrier at 16 mils.
- 2. Saw cuts, divots, pits, and small defects to be patched with Moisture Vapor Barrier.
- 3. Apply a layer 100% Solids Epoxy at 10 mils.
- 3. Broadcast flakes to full refusal into the Epoxy.
- 4. Apply a grout coat of Polyaspartic at 12 mils.
- 5. Apply a top coat of Polyaspartic at 6 mils.

