


SL Series

SLURRY FLOORING SYSTEMS



SL-2UcUdw

- ① Prepared Concrete
- ② Urethane Cement Slurry
- ③ Urethane w/ DiamondWear

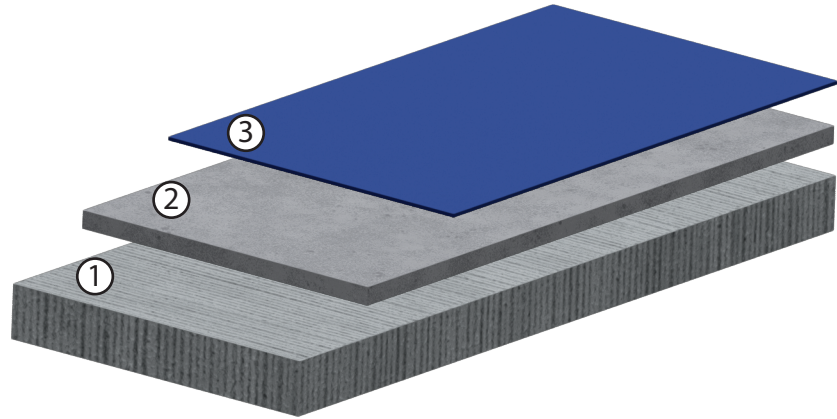

System Description:

The SL-2UcUdw is a high-performance slurry floor system. The system begins with a layer of urethane cement concrete slurry. The system is then top coated with a layer of aliphatic urethane enhanced with DiamondWear, a high wear additive. This system features good thermal-shock, chemical, and abrasion resistance. Suited for use in areas where the concrete slab is worn or slightly damaged.

System Advantages:

- Restores old or damaged concrete
- High compressive strengths
- High chemical resistance
- Complies with VOC regulations for Industrial Maintenance Coatings in the OTC and CA
- Quick turnaround/return to service
- Seamless
- High impact and abrasion resistance
- Extremely low odor
- Top coat lasts twice as long as standard urethanes; up to four times as long as standard epoxies
- Light stable, satin finish maintains fresh look
- Available in a wide array of colors

System Installation Overview:

1. Saw cuts, divots, pits, and small defects to be patched and filled with 100% Solids Epoxy.
2. Apply Urethane Cement concrete slurry 1/8" - 1/4".
3. Apply a top coat of Urethane with DiamondWear additive at 3-5 mils.

Concrete
Protection

Industrial
Toughness

Customer
Committed

480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537