


BC Series

BROADCAST FLOORING SYSTEMS



Brilliant BC-4EFPU

- ① Prepared Concrete
- ② 100% Solids Epoxy
- ③ Acrylic Flake Broadcast
- ④ 100% Solids Polyaspartic
- ⑤ Urethane

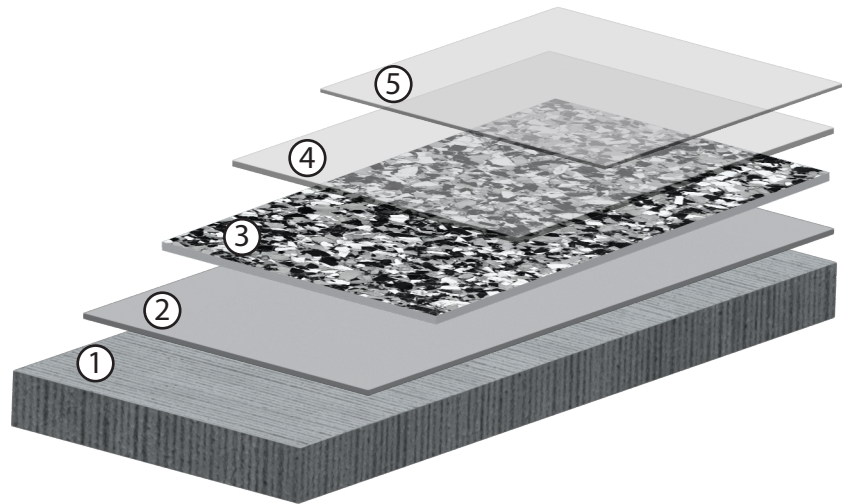

System Description:

The Brilliant BC-4EFPU is a high-performance broadcast system. The system begins with an epoxy base coat which acrylic flakes are fully broadcasted into. These flakes are then sealed a layer of polyaspartic and a top coated with a layer of aliphatic urethane enhanced with either DiamondWear or GlossGrip.

System Advantages:

- Quick turnaround/return to service
- Slip resistant
- High impact and abrasion resistance
- Easily repaired
- Hides dirt and debris
- Extremely low odor
- Top coat lasts twice as long as standard urethanes; up to four times as long as standard epoxies
- Highly chemical resistant
- Available in a wide array of colors

System Installation Overview:

1. Saw cuts, divots, pits, and small defects to be patched and filled with 100% Solids Epoxy.
2. Apply a layer of pigmented 100% Solids Epoxy at 10 mils.
3. Broadcast flake to full refusal into epoxy.
4. Apply a grout coat of 100% Solids Polyaspartic at 12 mils.
5. Apply a top coat of Urethane with DiamondWear or GlossGrip additive at 3-5 mils.

Concrete
Protection

Industrial
Toughness

Customer
Committed

480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC#323537