


CT Series
FLOOR COATING SYSTEMS



Brilliant CT-3EEU

- ① Prepared Concrete
- ② 100% Solids Epoxy
- ③ 100% Solids Epoxy
- ④ Urethane w/ DiamondWear or GlassGrip

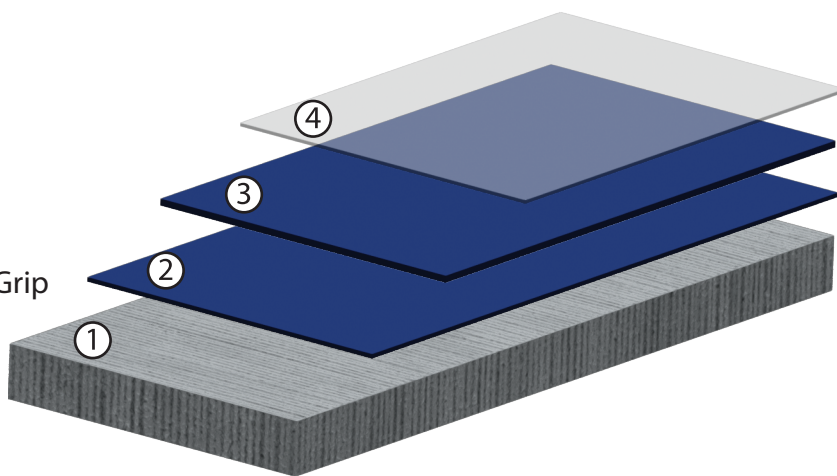

System Description:

The Brilliant CT-3EEU system is a high-performance thin mil system. The system begins with a scratch and build coat of 100% solids epoxy. The system is then top coated with aliphatic urethane enhanced with DiamondWear or GlassGrip, a high wear additive. This coating system can be pigmented in a variety of colors and features excellent chemical resistance.

System Advantages:

- High-build application
- Highly chemical resistant
- Low odor
- Urethane top coat lasts twice as long as standard urethanes; up to four times as long as standard epoxies
- Slip resistant
- Available in a wide array of colors

System Installation Overview:

1. Saw cuts, divots, pits, and small defects to be patched and filled with 100% Solids Epoxy.
2. Apply a scratch coat of pigmented or clear 100% Solids Epoxy at 3-5 mils.
3. Apply a build coat of pigmented 100% Solids Epoxy at 10-15 mils.
4. Apply a top coat of pigmented Urethane with DiamondWear or GlassGrip additive at 3-5 mils.



480-203-2444
info@brilliantaz.com
www.brilliantaz.com
ROC #323537