




Brilliant BC-5EQPQP

- 1 Prepared Concrete
- (2) 100% Solids Epoxy
- (3) Decorative Quartz Broadcast
- 4 100% Solids Polyaspartic
- (5) Decorative Quartz Broadcast
- (6) 100% Solids Polyaspartic

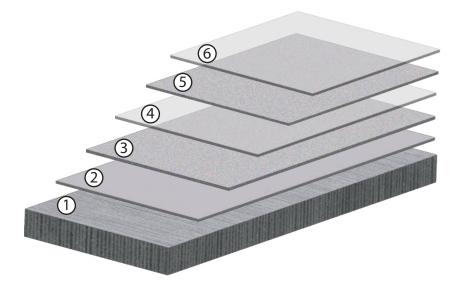

System Description:

The BC-5EQPQP is a high-performance, double broadcast system. This system begins with a layer of epoxy in which decorative quartz is fully broadcasted into. The quartz is then sealed with a layer of polyaspartic. Another layer of decorative quartz is broadcasted into the polyaspartic. This layer of quartz is then sealed with a layer of polyaspartic.

System Advantages:

- Quick turnaround/return to service
- Decorative
- Slip resistant
- · High impact and abrasion resistance
- · Easily repaired
- Low odor
- Color and UV stable

System Installation Overview:

- 1. Saw cuts, divots, pits, and small defects to be patched and filled with 100% Solids Epoxy.
- 2. Apply a layer of 100% Solids Epoxy at 10 mils.
- 3. Broadcast decorative quartz to full refusal into the epoxy.
- 4. Apply a layer of 100% Solids Polyaspartic at 10 mils.
- 5. Broadcast decorative quartz to full refusal into the polyaspartic.
- 6. Apply a grout coat of 100% Solids Polyaspartic at 10 mils.

